
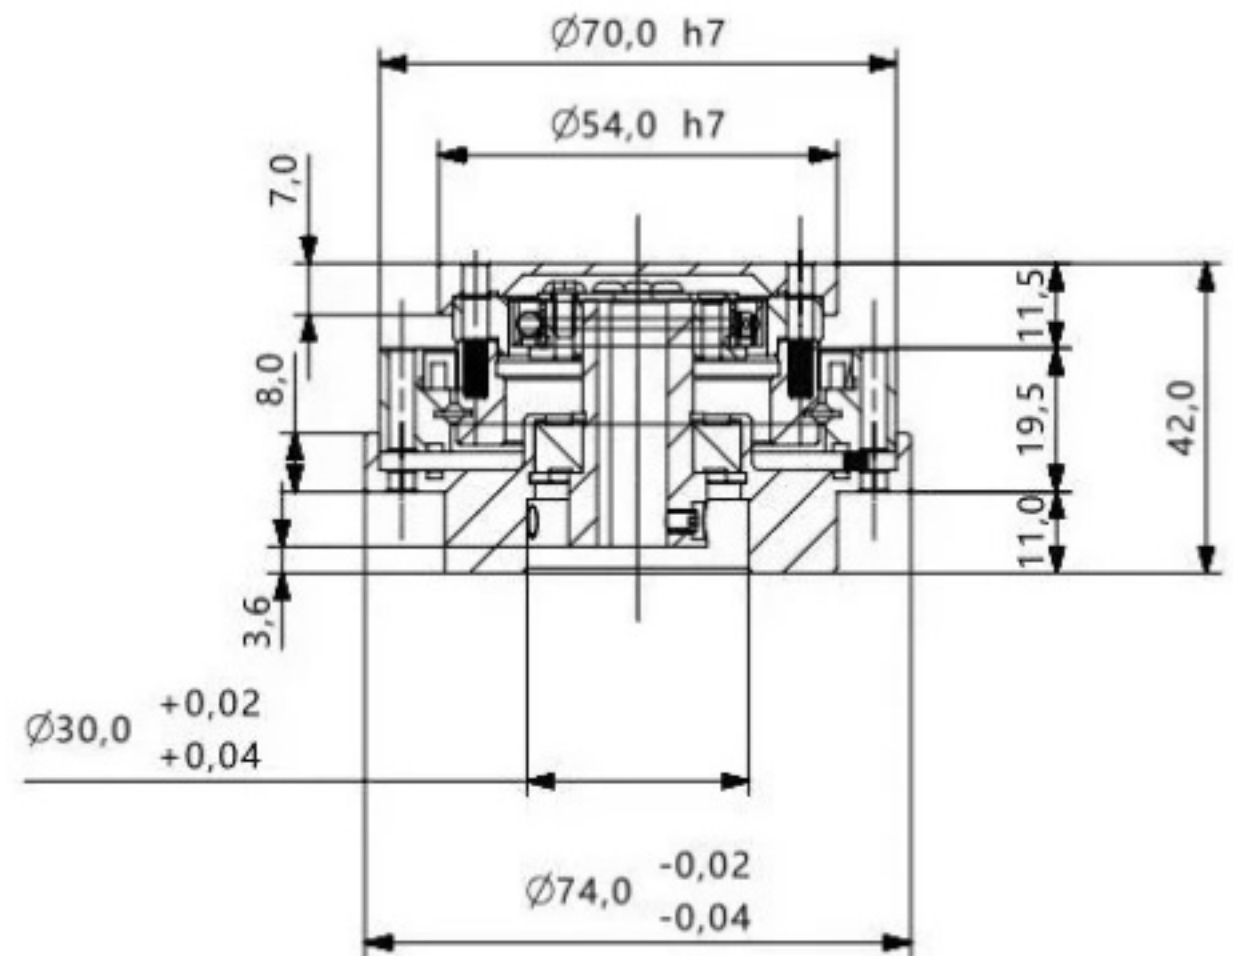
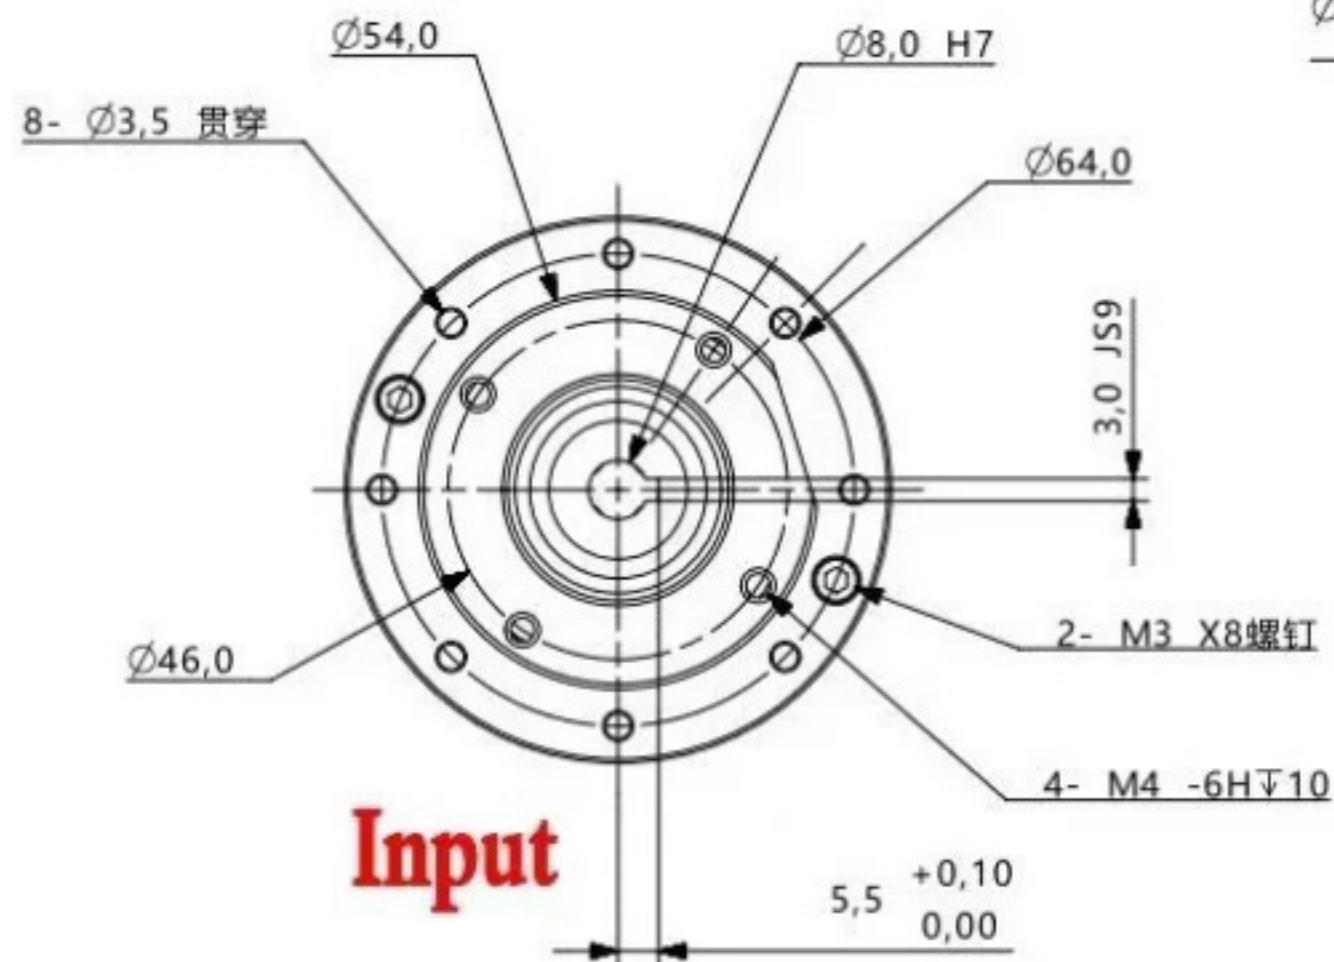





Model	Ratio	Backlash	input 2000r/min Rated output torque	Max Torque at start and stop	Average load torque	Max Instantaneous torque	Max Input Speed	Rated Input Speed	Moment of inertia	
		Arcsec	N.m	N.m	N.m	N.m	R/Min	R/Min	$\times 10^{-4}\text{kgm}^2$	$\times 10^{-5}\text{kgfms}^2$
FA14	50	20 $\leq$	7	23	9	46	8500	3500	0.033	0.034
	80		10	30	14	61				
	100		10	36	14	70				
FA17	50	20 $\leq$	21	44	34	91	7300	3500	0.079	0.081
	80		29	56	35	113				
	100		31	70	51	143				
FA20	50	20 $\leq$	33	73	44	127	6500	3500	0.193	0.197
	80		44	96	61	165				
	100		52	107	64	191				
FA25	50	20 $\leq$	51	127	72	234	5600	3500	0.413	0.421
	80		82	178	113	332				
	100		87	204	140	369				
FA32	50	20 $\leq$	99	281	140	497	5800	3500	1.69	1.72
	80		153	395	217	738				
	100		178	433	281	841				

FA14 8mm Input for 40mm Flange Servo Motor

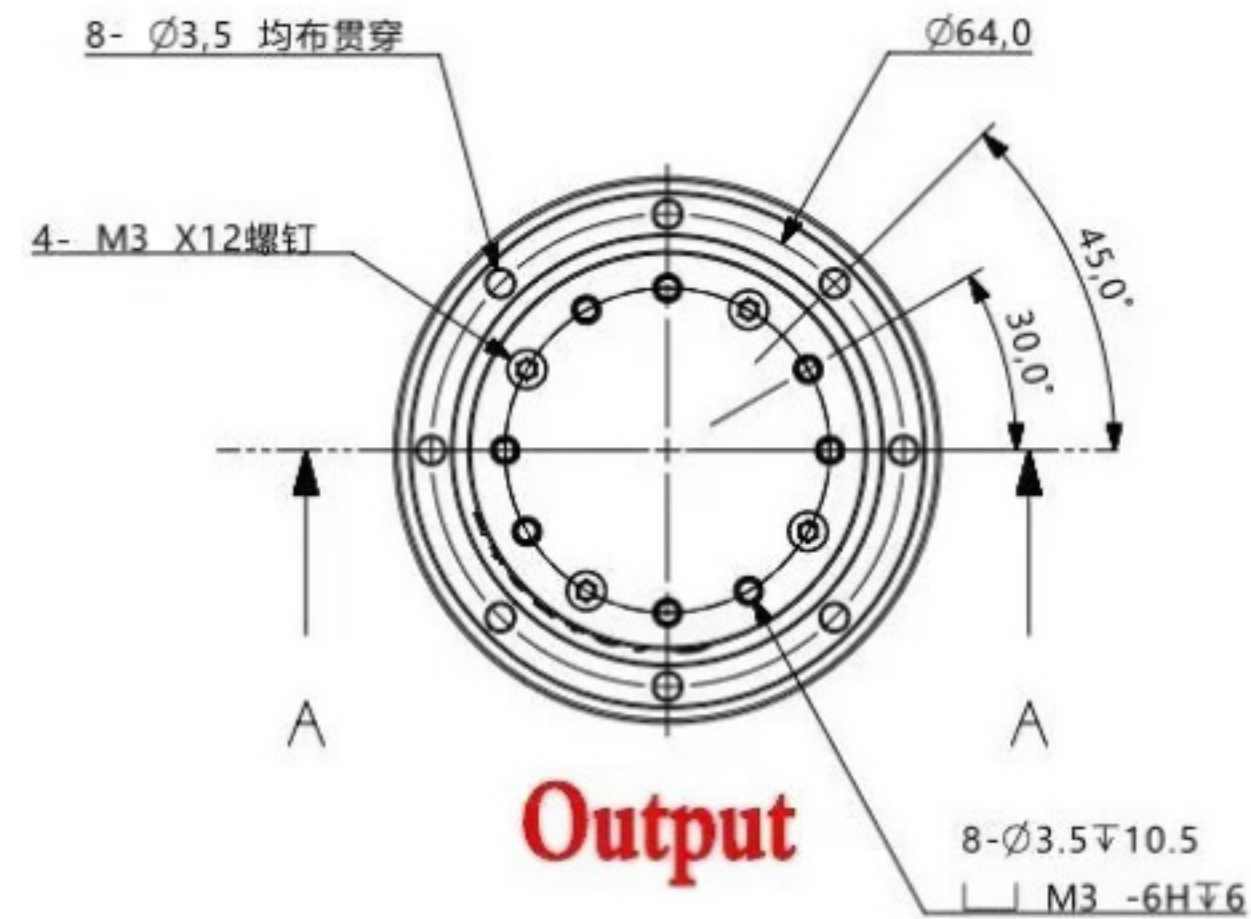


SECTION A - A


FA17 8mm Input for 40mm Flange Servo Motor

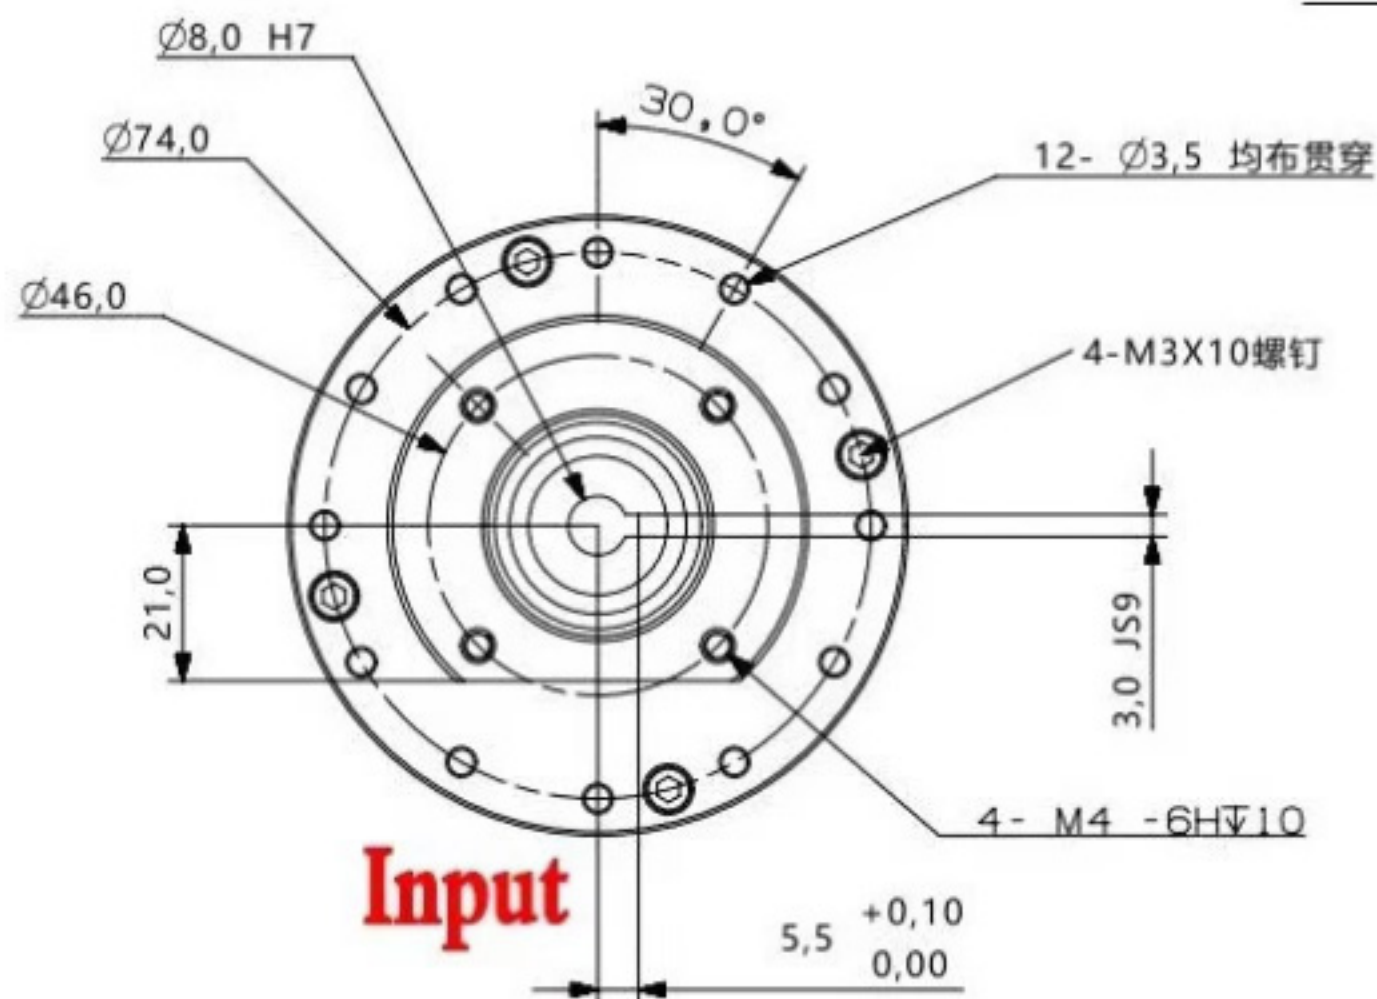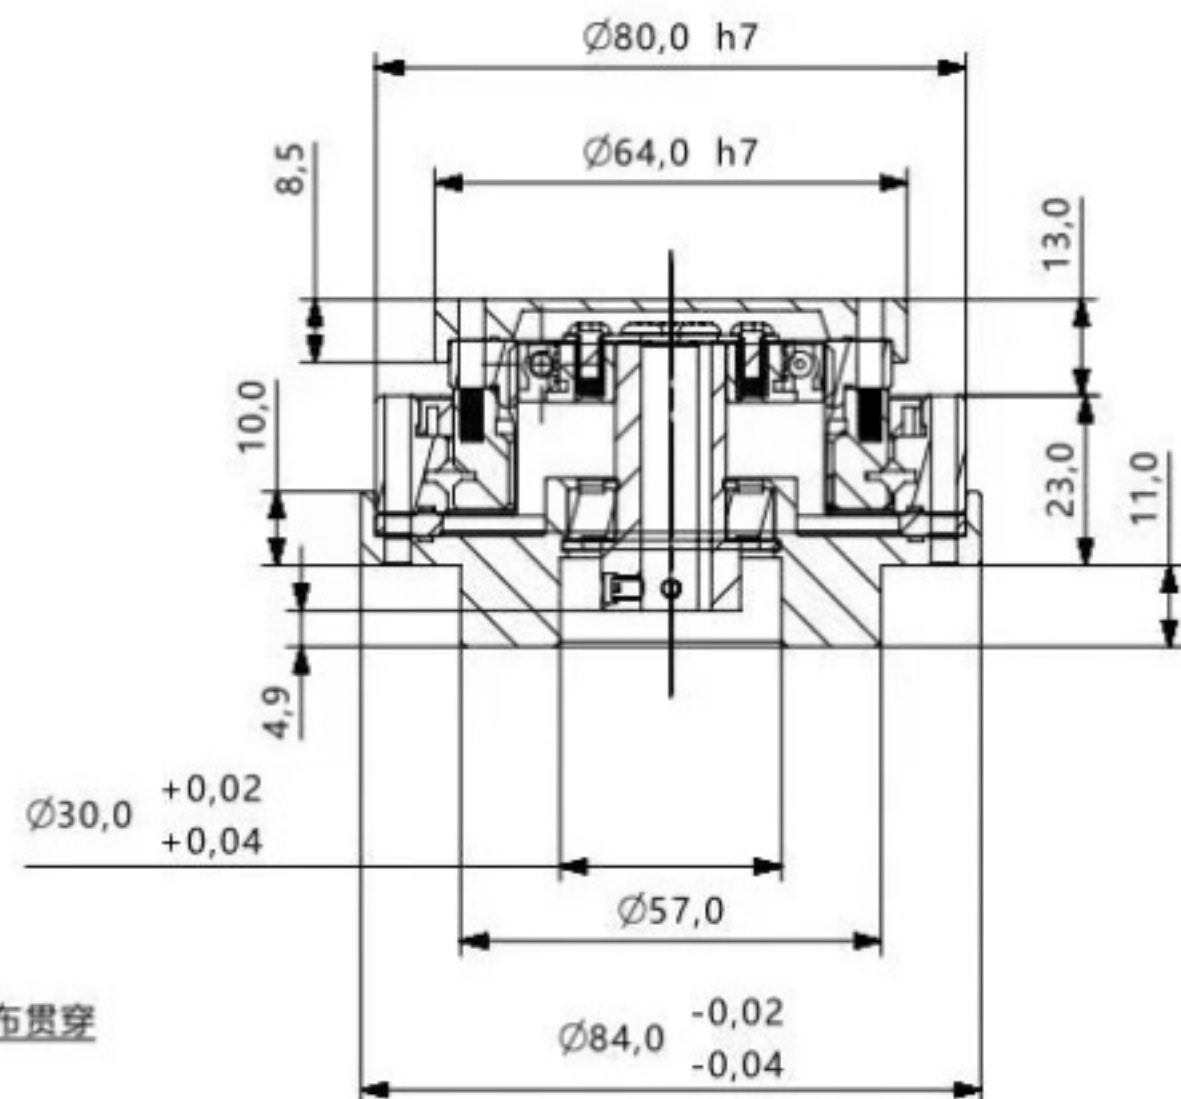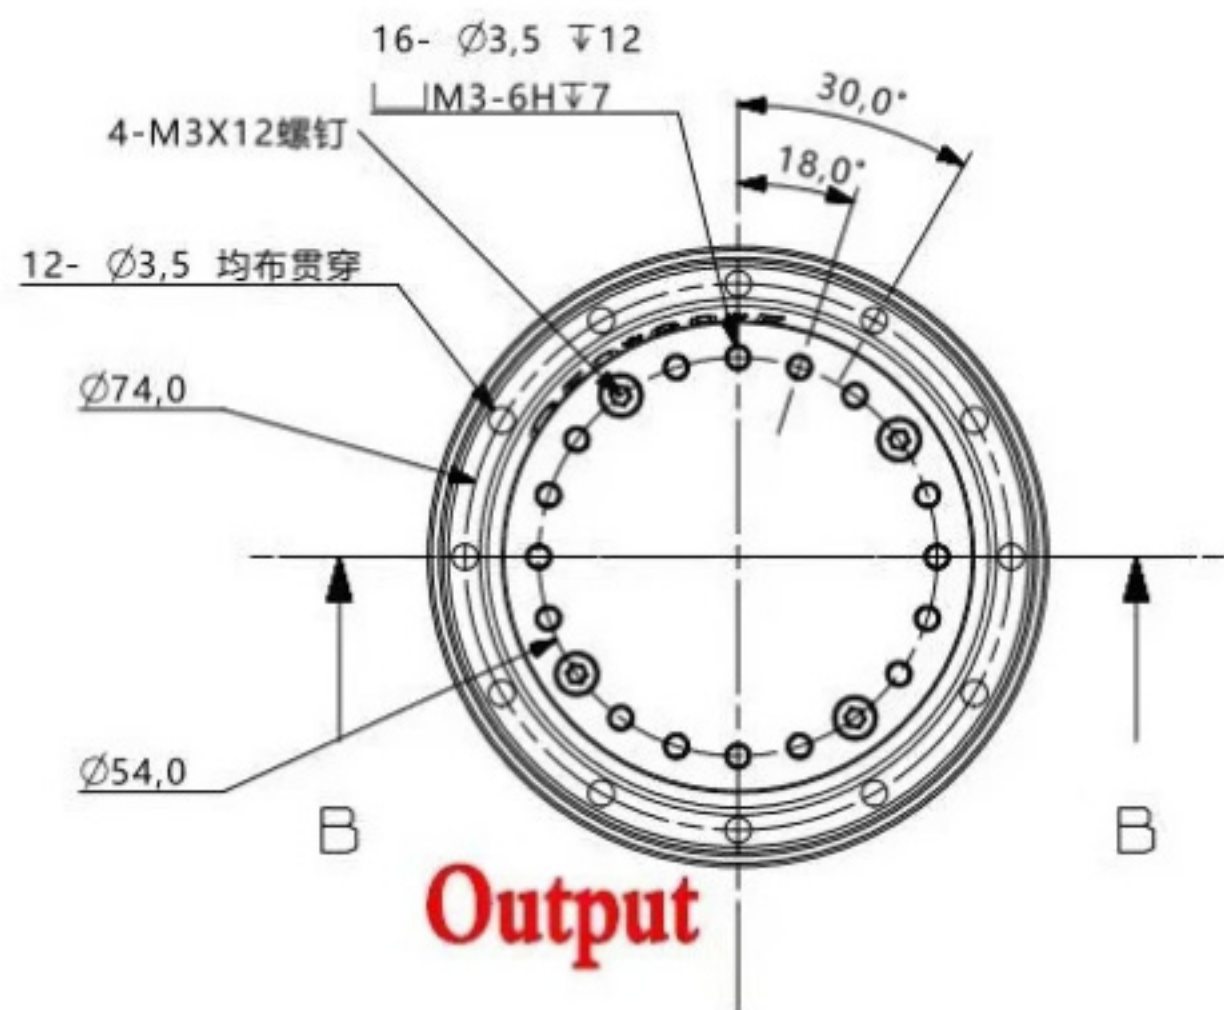


FA20 14mm Input for 60mm Flange Servo Motor

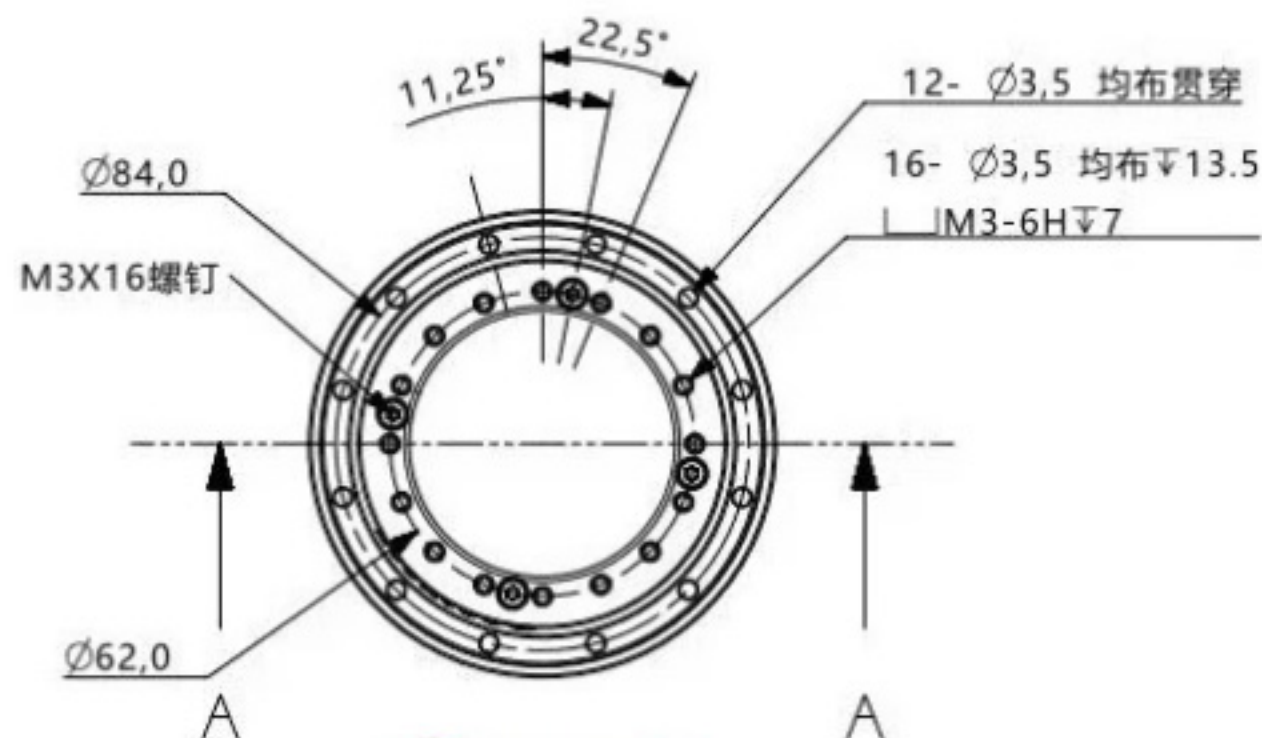




Output

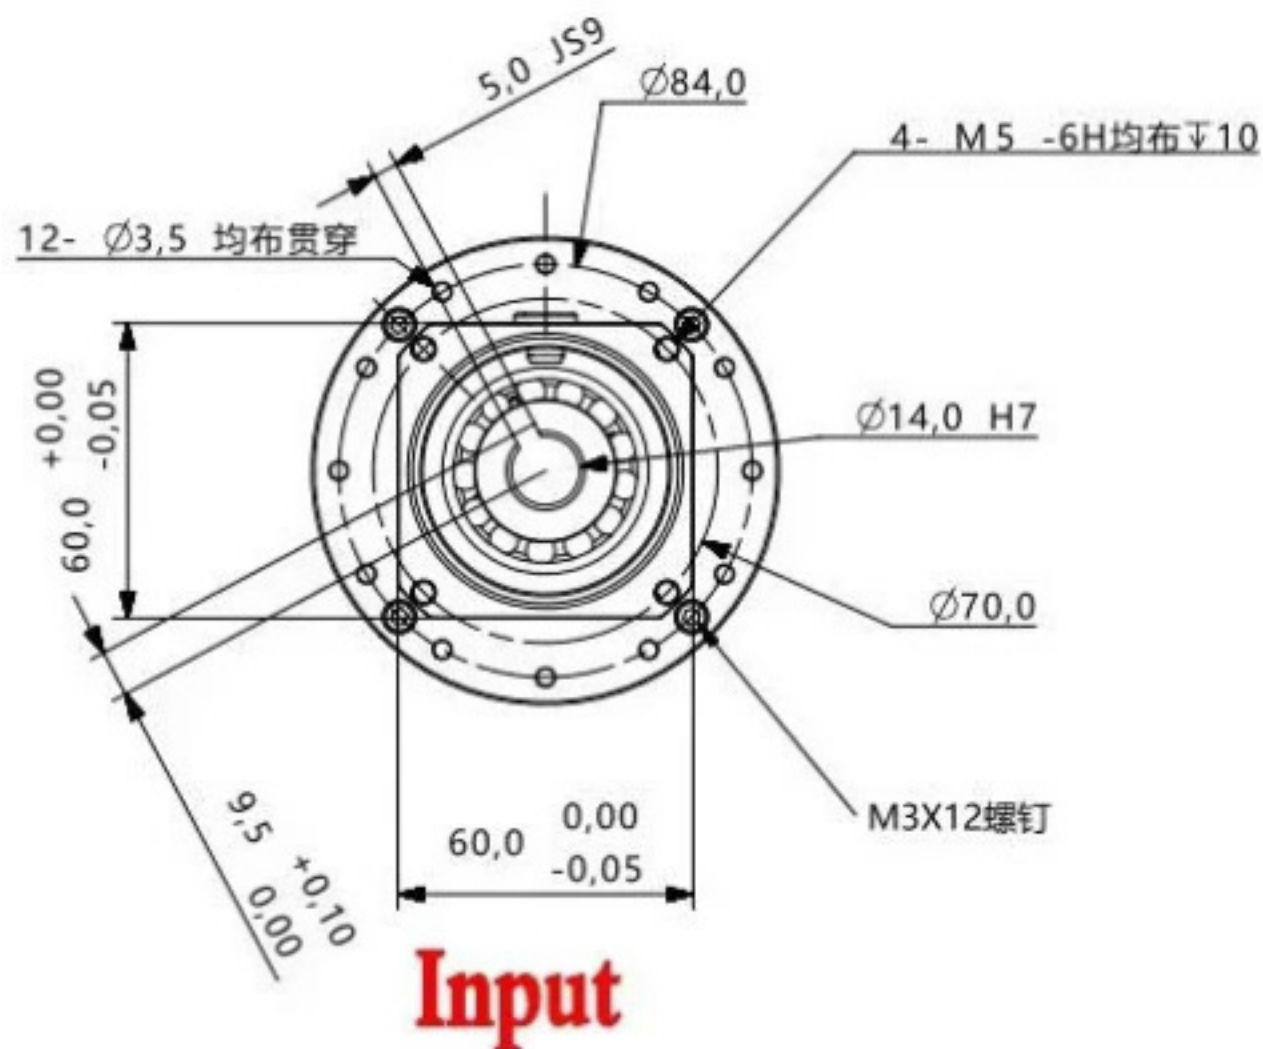

Input

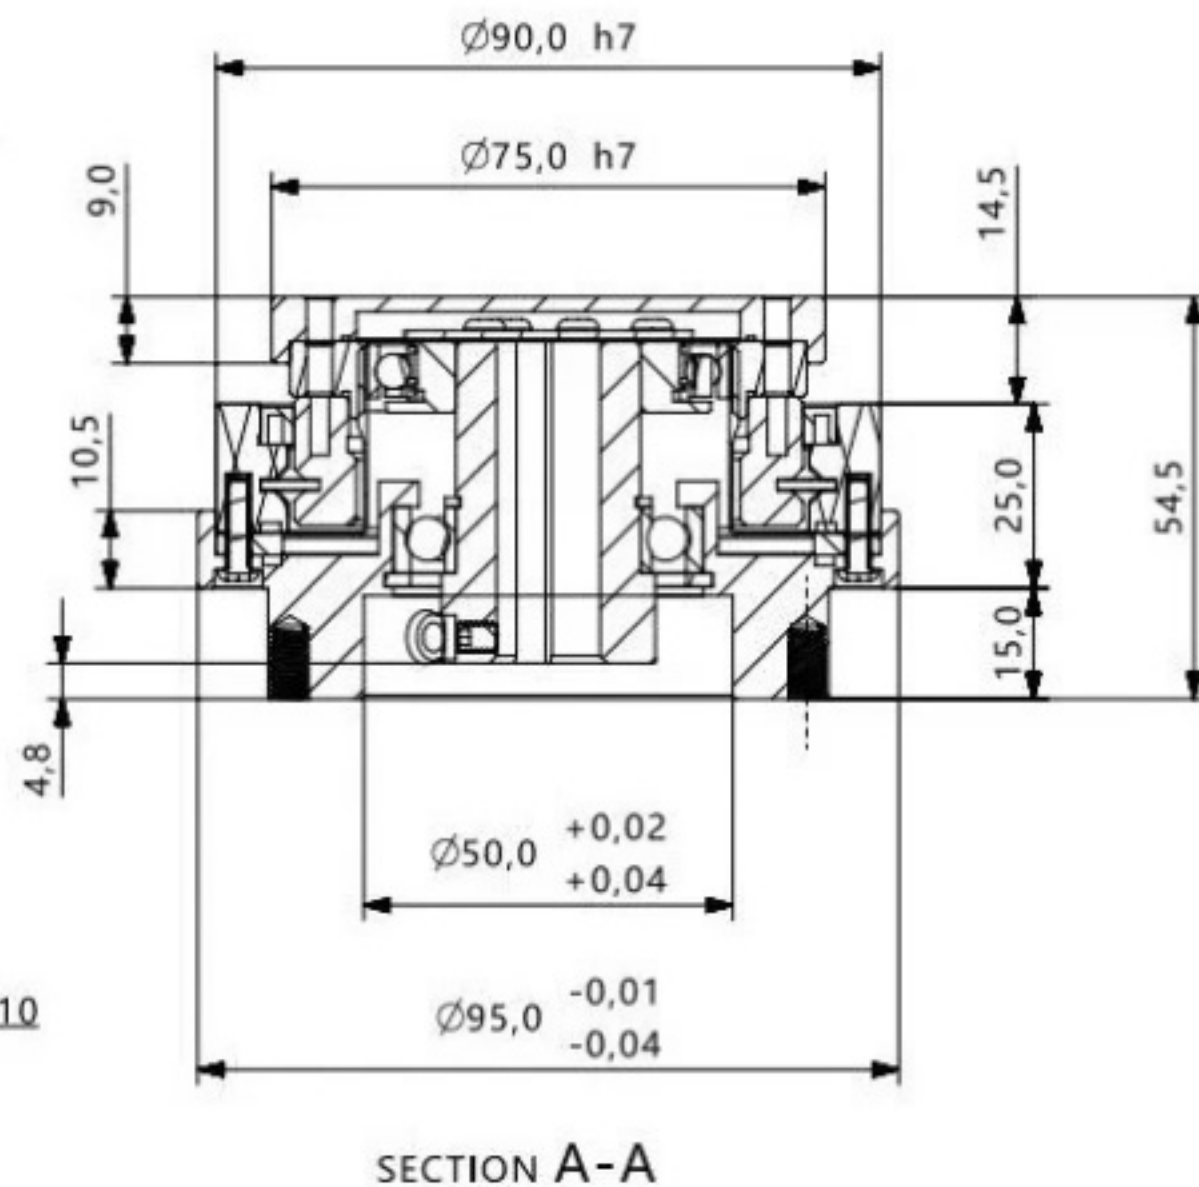

FA25 14mm Input for 60mm Flange Servo Motor

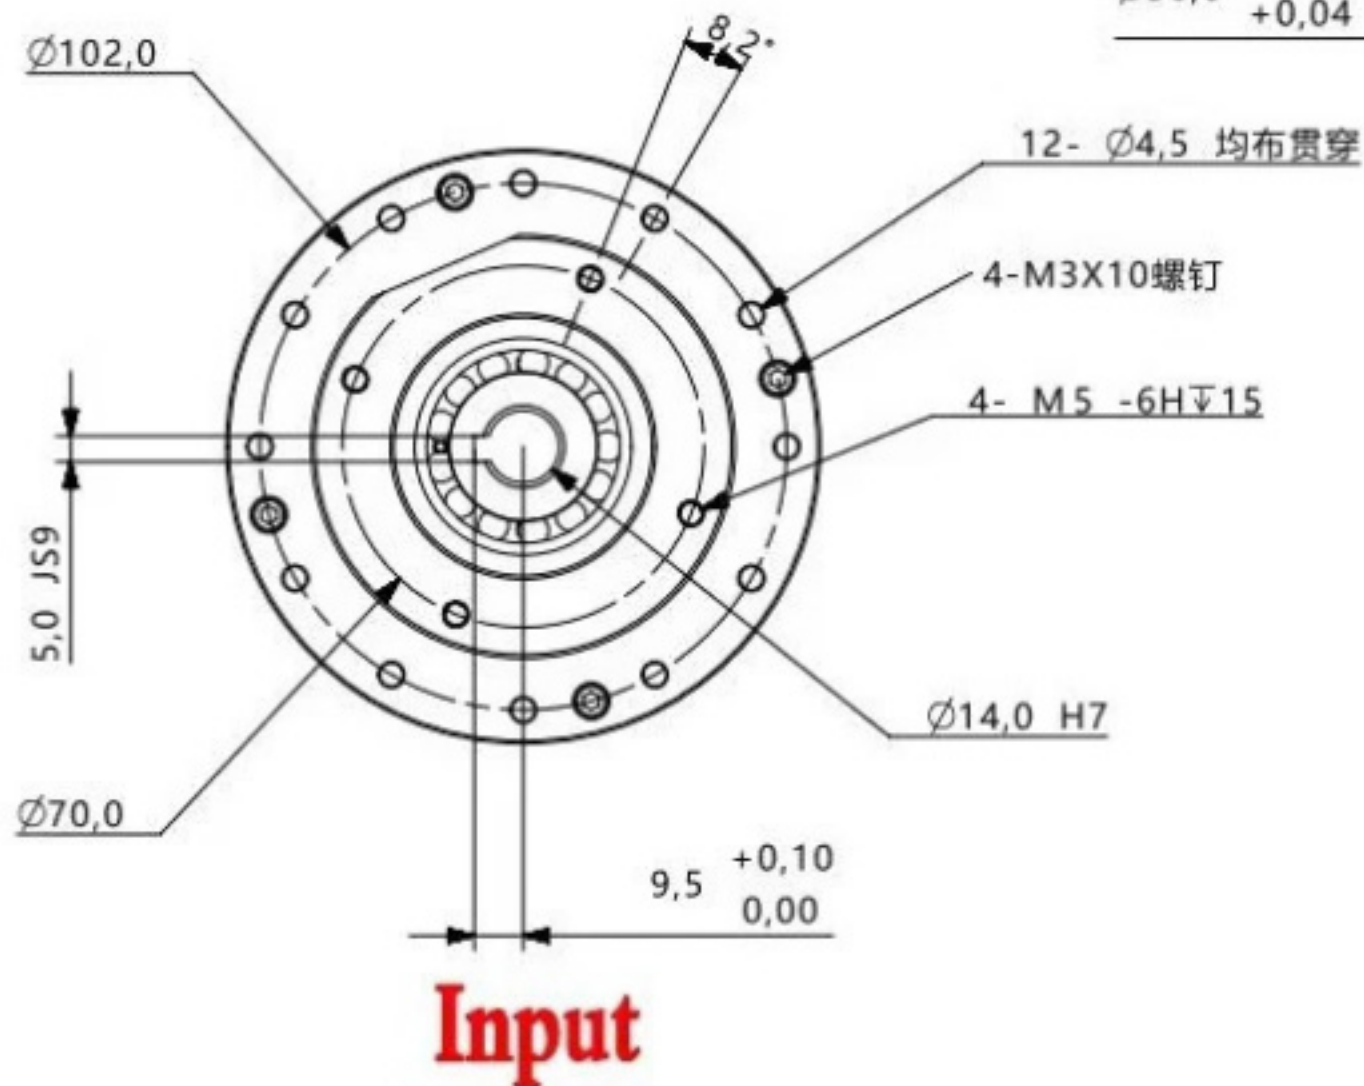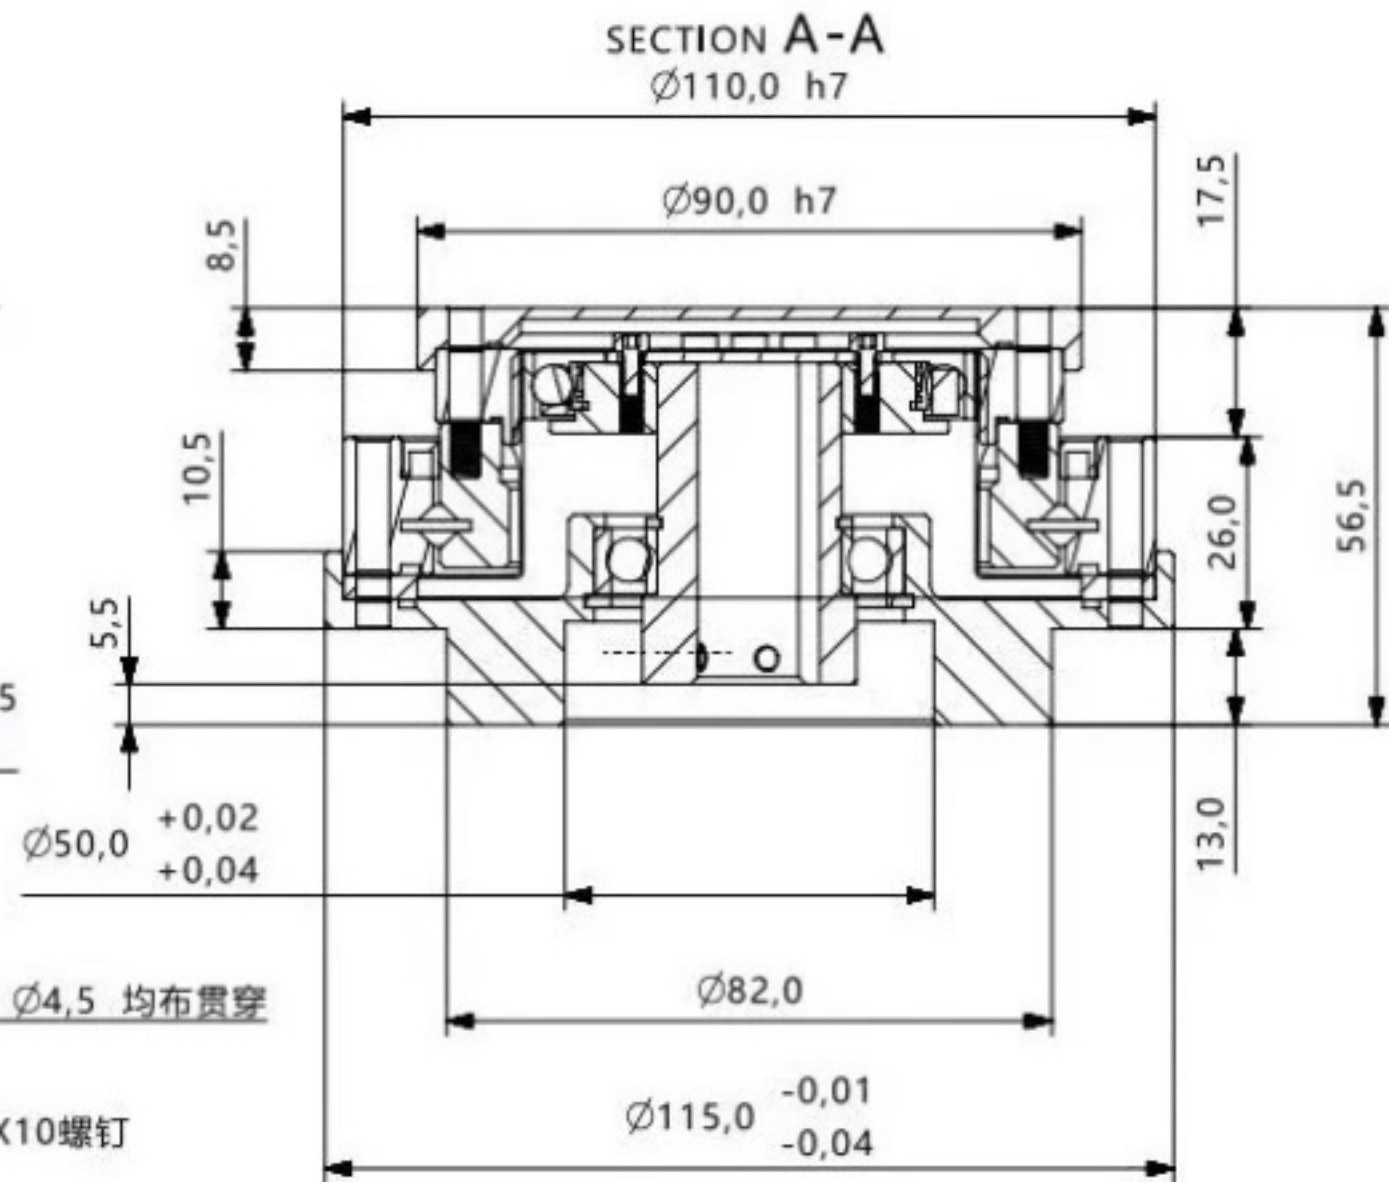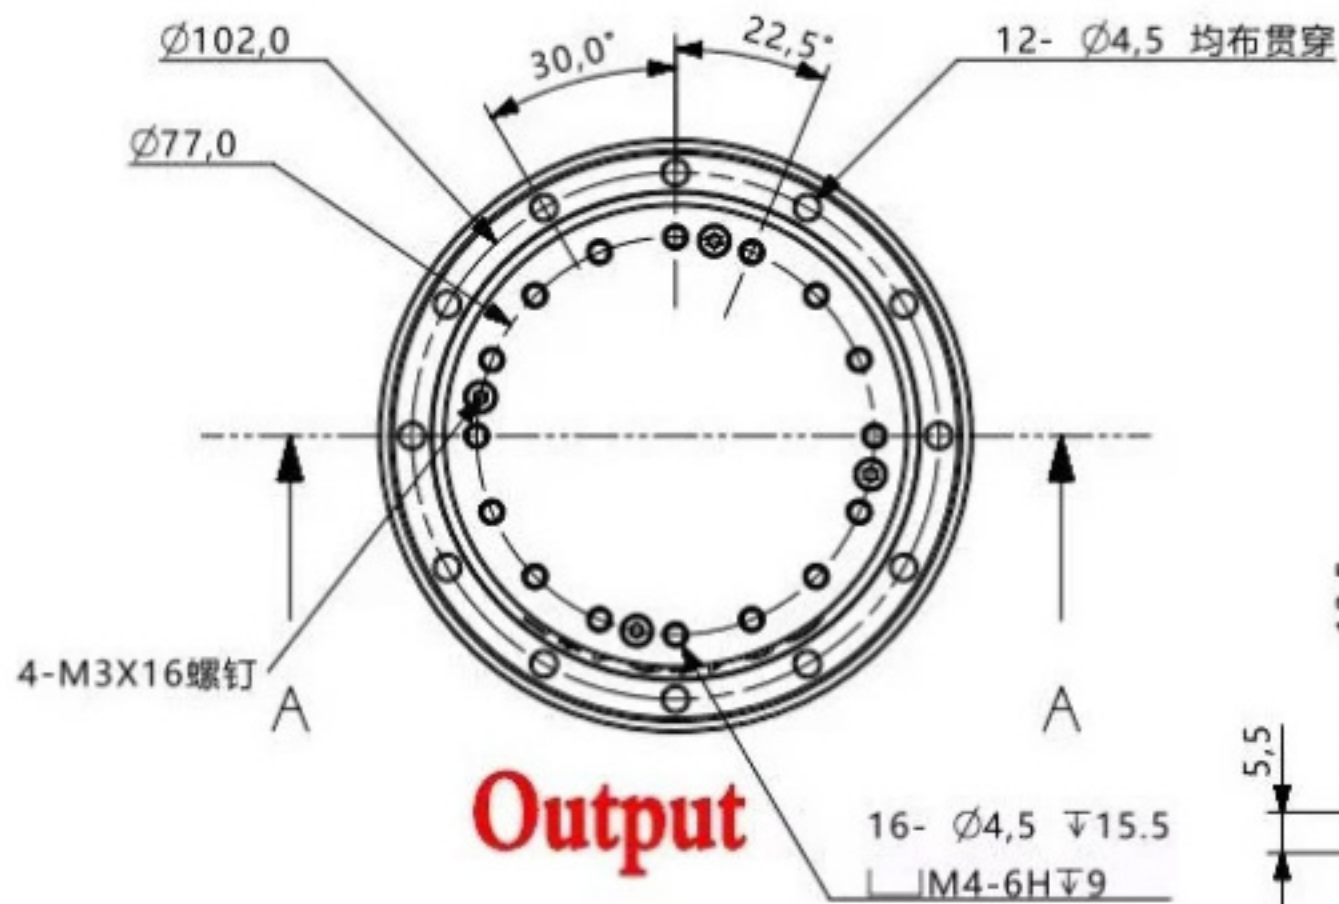

FA32 19mm Input for 80mm Flange Servo Motor

