
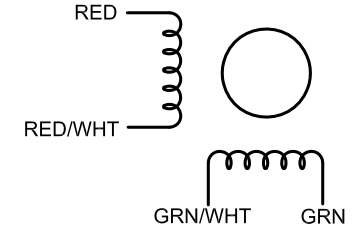


| SPECIFICATION | CONNECTION | BIPOLAR |
|--|------------|-------------|
| AMPS/PHASE | | 2.00 |
| RESISTANCE/PHASE(Ohms)@25°C | | 2.15±10% |
| INDUCTANCE/PHASE(mH)@1KHz | | 6.90±20% |
| HOLDING TORQUE(Nm)[lb-in] | | 1.45[12.84] |
| STEP ANGLE(°) | | 1.80 |
| STEP ACCURACY(NON-ACCUM) | | ±5.00% |
| ROTOR INERTIA(g-cm ²) | | — |
| WEIGHT(Kg)[lb] | | — |
| TEMPERATURE RISE:MAX.80°C (MOTOR STANDSTILL;FOR 2PHASE ENERGIZED) | | |
| AMBIENT TEMPERATURE -10°C~50°C[14°F~122°F] | | |
| INSULATION RESISTANCE 100 Mohm (UNDER NORMAL TEMPERATURE AND HUMIDITY) | | |
| INSULATION CLASS B 130°C[266°F] | | |
| DIELECTRIC STRENGTH 500VAC FOR 1MIN.(BETWEEN THE MOTOR COILS AND THE MOTOR CASE) | | |
| AMBIENT HUMIDITY MAX.85%(NO CONDENSATION) | | |

| TYPE OF CONNECTION (EXTERN) | | MOTOR | |
|-----------------------------|---------|---------|---------|
| PIN NO | BIPOLAR | LEADS | WINDING |
| 1 | A — | RED | A |
| 2 | A\ — | RED/WHT | A\ |
| 3 | B — | GRN/WHT | B |
| 4 | B\ — | GRN | B\ |

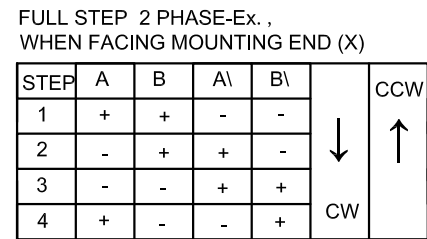

| | | | | |
|--|-------|-----------|-----------|------------------------|
| | APVD | | 3.10.2020 | <h1>STEPPER MOTOR</h1> |
| | CHKD | | | |
| | 1:1.5 | DRN | | <h2>23HS26-2004H</h2> |
| | SCALE | SIGNATURE | DATE | |