
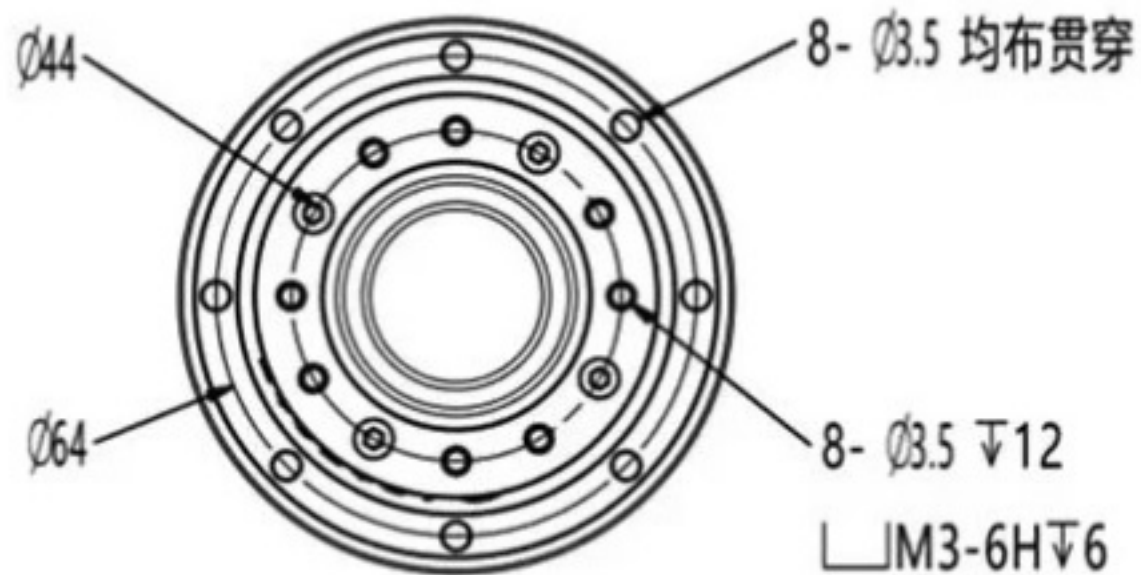
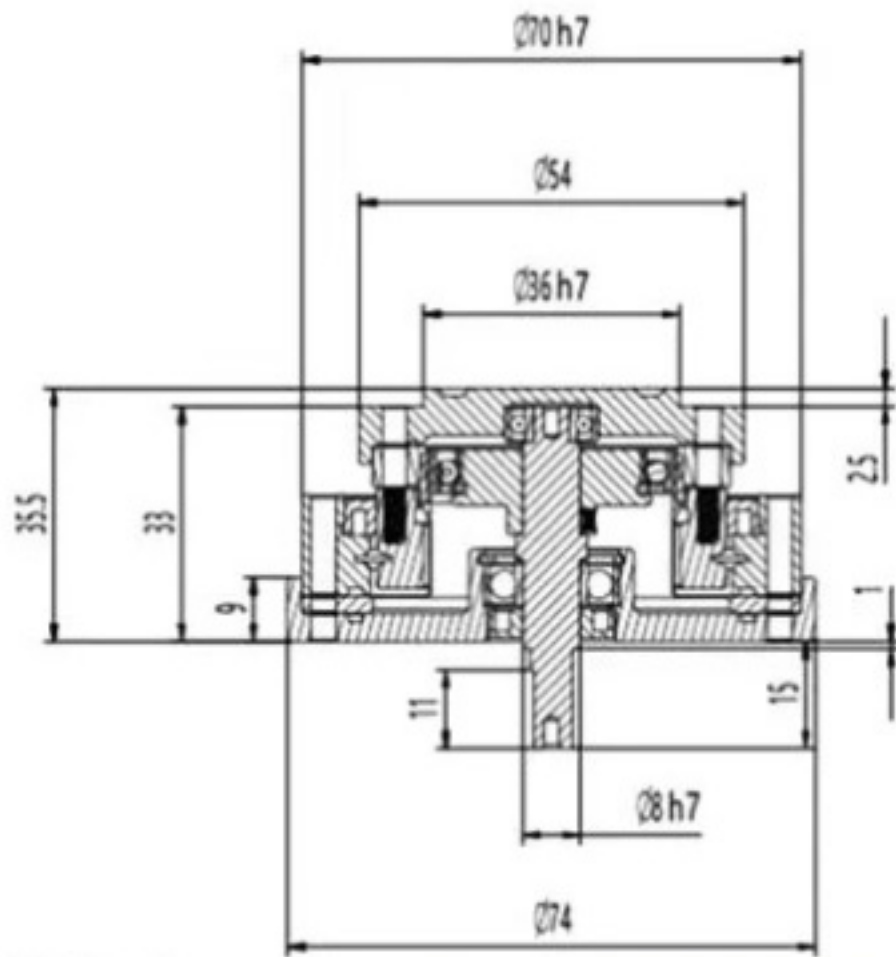





Model	Speed ratio	Backlash	Weight	Rated torque at 2000r/min input		Permissible peak torque at start stop		Allowable MAX value of average load torque		Instantaneous MAX allowable torque		MAX allowable input speed r/min		Allowable average input speed r/min		Moment of inertia	
		arcsec	kg	Nm	kgfm	Nm	kgfm	Nm	kgfm	Nm	kgfm	Oil	Lubricating grease	Oil	Lubricating grease	X10- ⁴ kgm ²	X10- ⁵ kgfms ²
ZXJ 14	30:1	≤30	0.68	4	0.41	9	0.92	6.8	0.69	17	1.7	14000	8500	6500	3500	0.033	0.034
	50:1			7	0.7	23	2.3	9	0.9	46	4.7						
	80:1			10	1	30	3.1	14	1.4	61	6.2						
	100:1			10	1	36	3.7	14	1.4	70	7.2						
ZXJ 17	30:1	≤30	0.65	8.8	0.9	16	1.6	12	1.2	30	3.1	10000	7300	6500	3500	0.079	0.081
	50:1			21	2.1	44	4.5	34	3.4	91	9						
	80:1			29	2.9	56	5.7	35	3.6	113	12						
	100:1			31	3.2	70	7.2	51	5.2	143	15						
	120:1			31	3.2	70	7.2	51	5.2	112	11						
ZXJ 20	30:1	≤30	0.91	15	1.5	27	2.8	20	2	50	5.1	10000	6500	6500	3500	0.193	0.197
	50:1			33	3.3	73	7.4	44	4.5	127	13						
	80:1			44	4.5	96	9.8	61	6.2	165	17						
	100:1			52	5.3	107	10.9	64	6.5	191	20						
	120:1			52	5.3	113	11.5	64	6.5	191	20						
ZXJ 25	30:1	≤30	1.44	27	2.8	50	5.1	38	3.9	95	9.7	7500	5600	5600	3500	0.413	0.421
	50:1			51	5.2	127	13	72	7.3	242	25						
	80:1			82	8.4	178	18	113	12	332	34						
	100:1			87	8.9	204	21	140	14	369	38						
	120:1			87	8.9	217	22	140	14	395	40						
ZXJ 32	30:1	≤30	3	54	5.5	100	10	75	7.7	200	20	7000	4800	4600	3500	1.69	1.72
	50:1			99	10	281	29	140	14	497	51						
	80:1			153	16	395	40	217	22	738	75						
	100:1			178	18	433	44	281	29	841	86						
	120:1			178	18	459	47	281	29	892	91						
	160:1			178	18	484	49	281	29	892	91						

ZXJ14 Harmonic Reducer

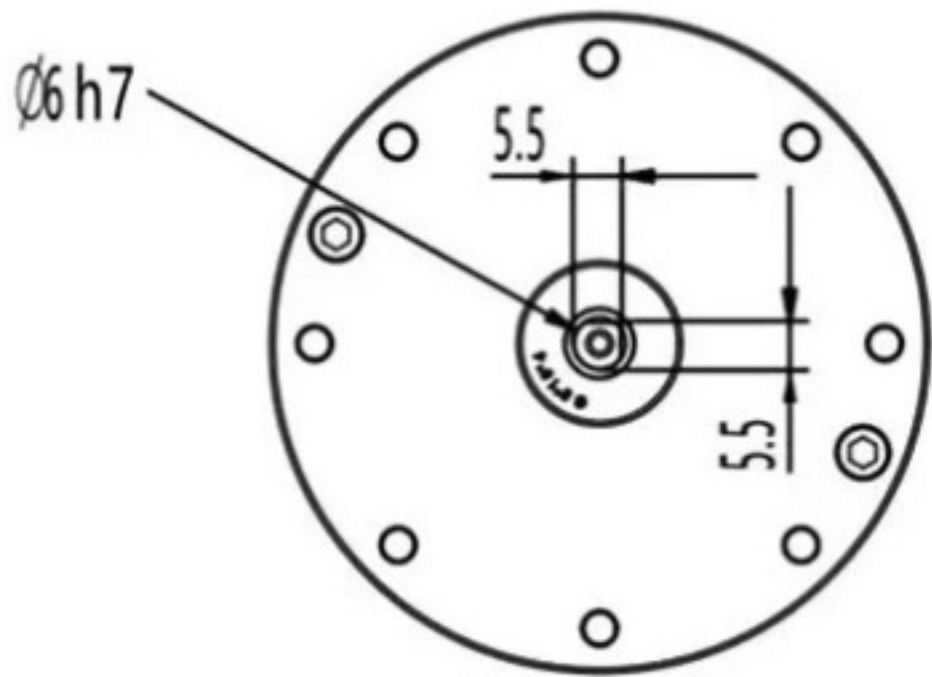




This harmonic reducer is connected to the motor using synchronous wheels and belts, and is not equipped by default. If you need it, you can contact us for customization.

ZXJ17 Harmonic Reducer

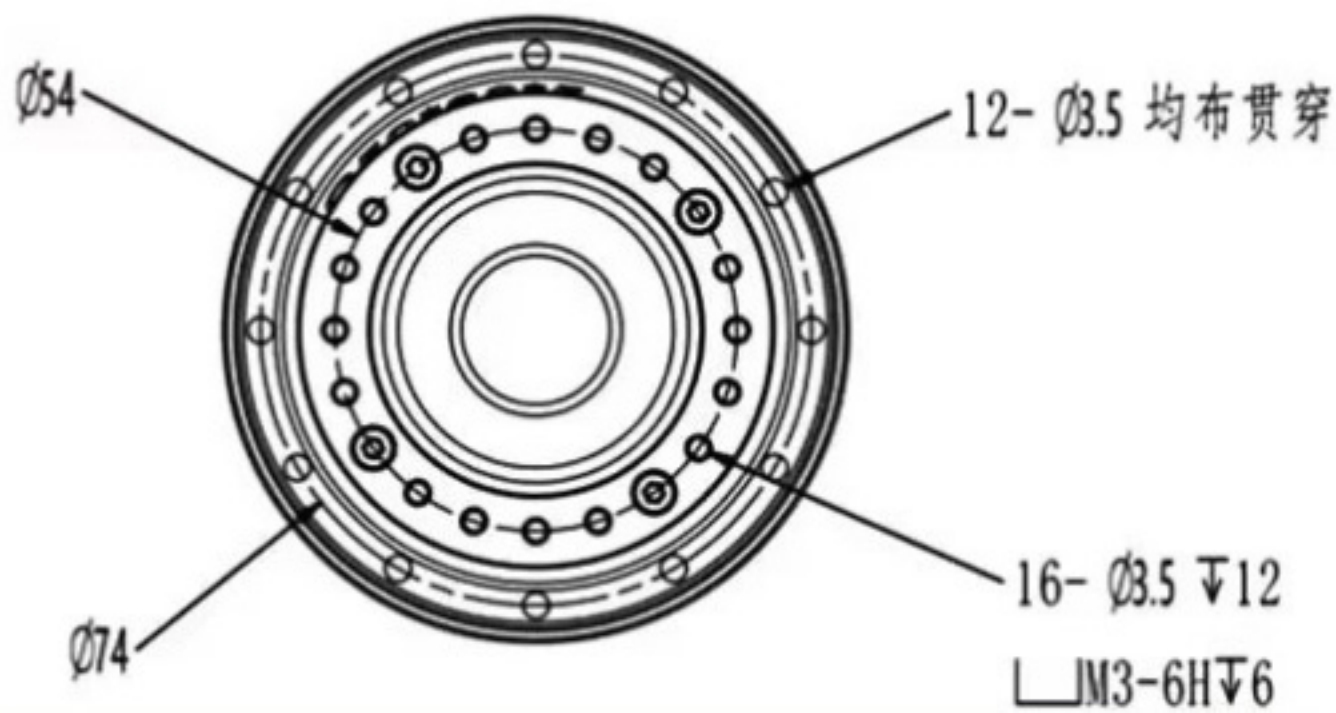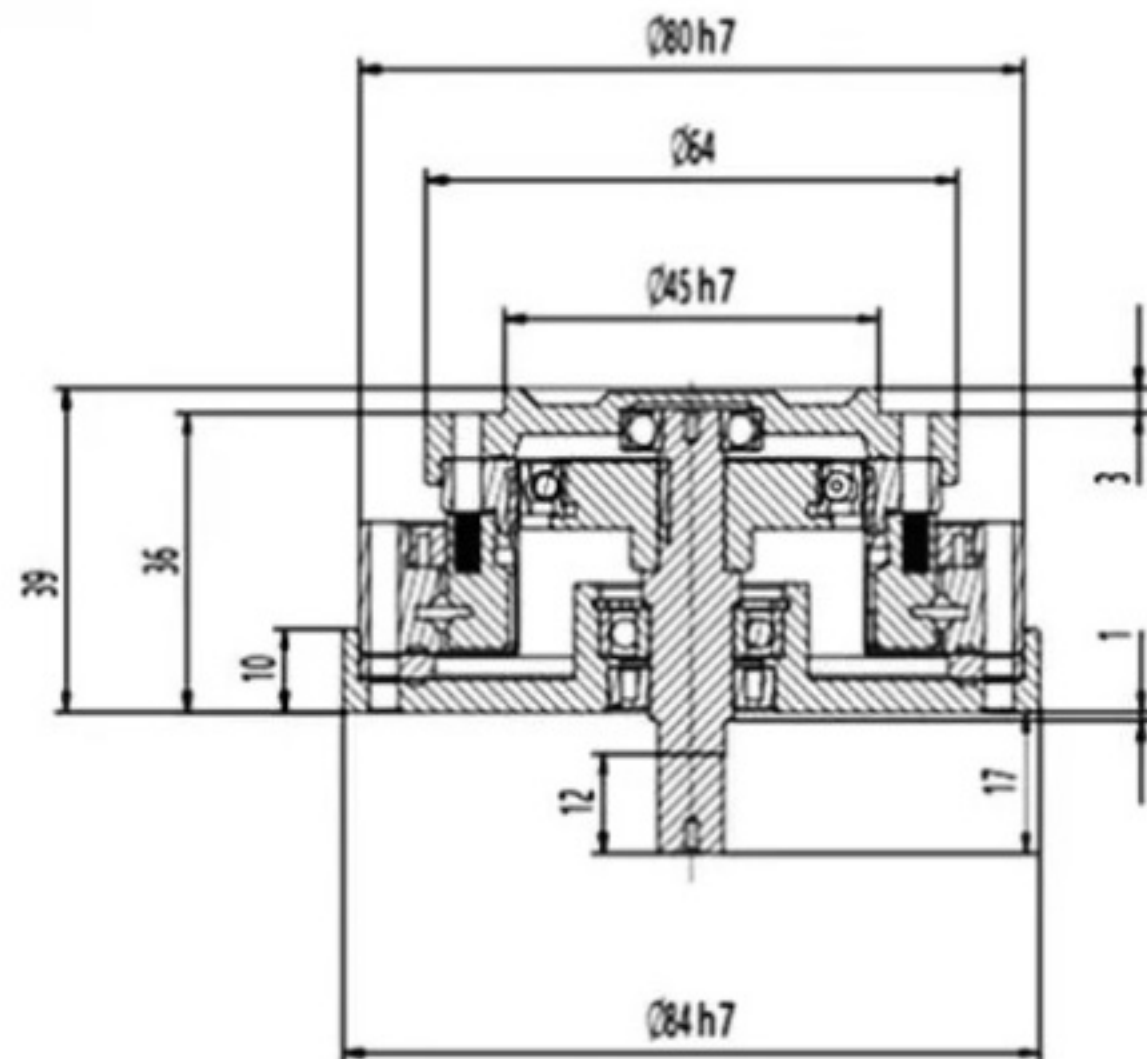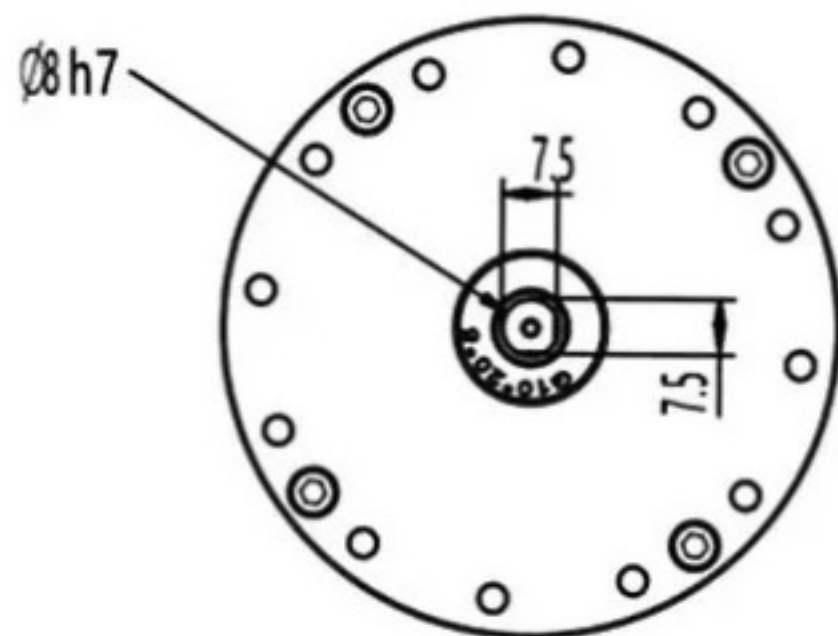


This harmonic reducer is connected to the motor using synchronous wheels and belts, and is not equipped by default. If you need it, you can contact us for customization.

ZXJ20 Harmonic Reducer

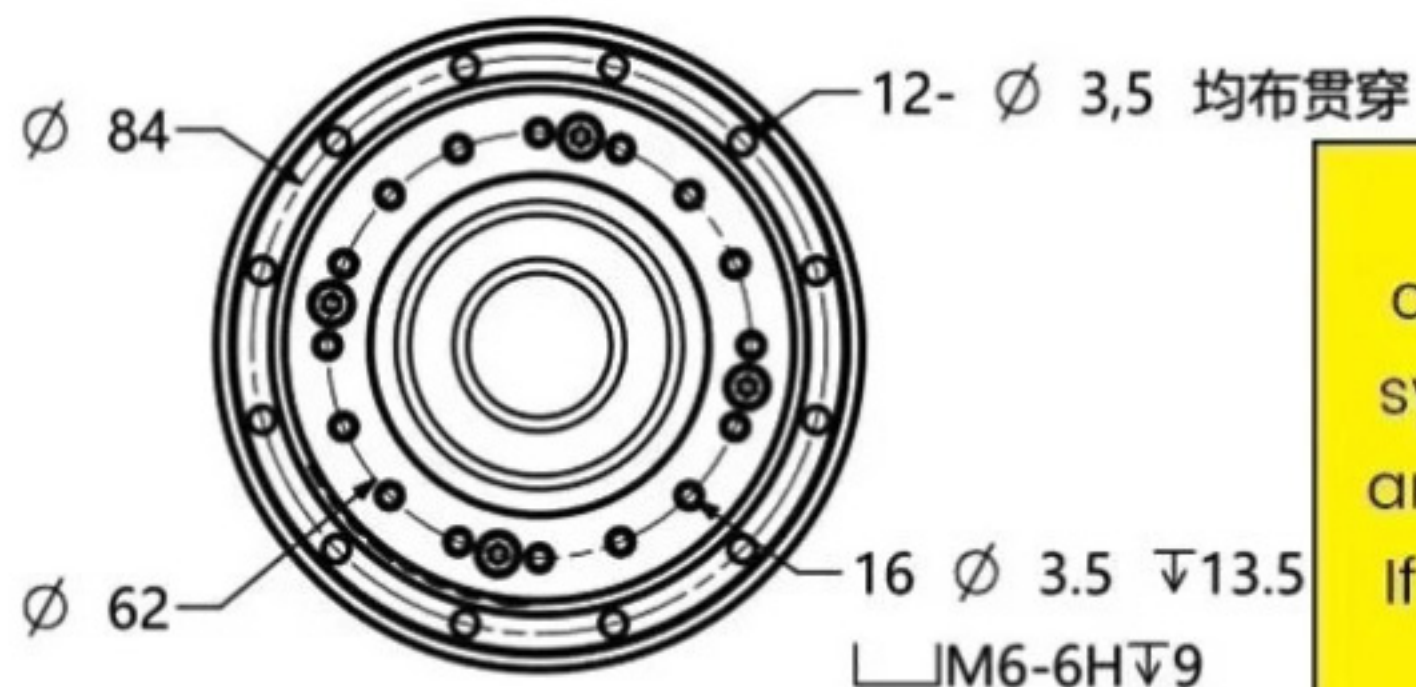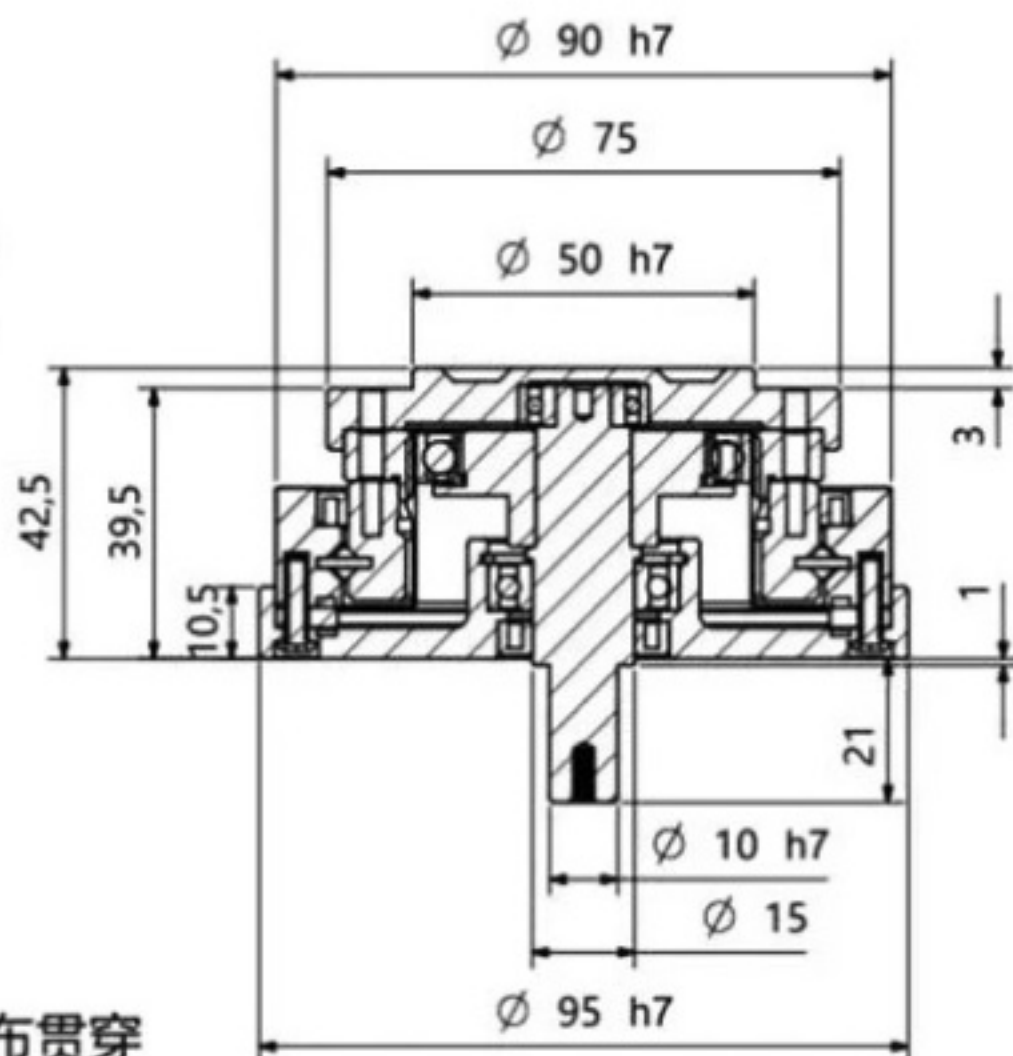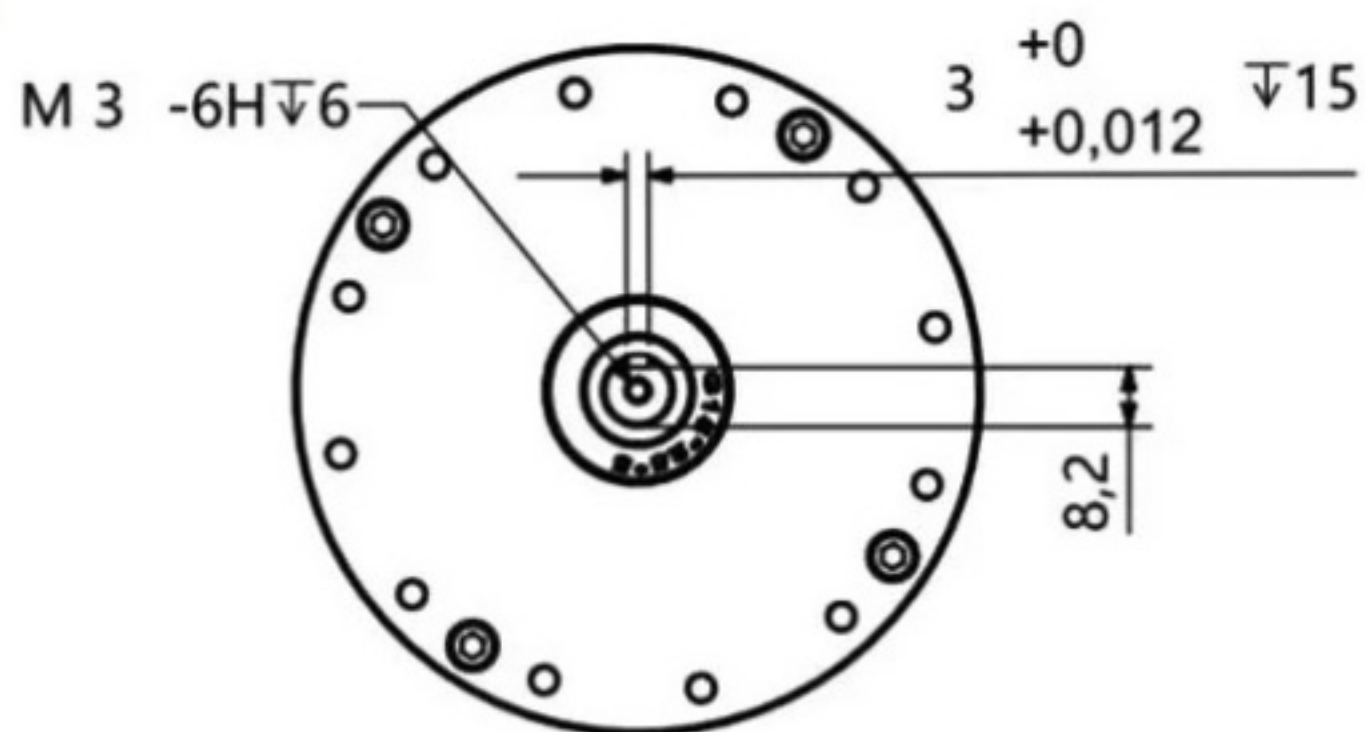

This harmonic reducer is connected to the motor using synchronous wheels and belts, and is not equipped by default. If you need it, you can contact us for customization.

ZXJ25 Harmonic Reducer

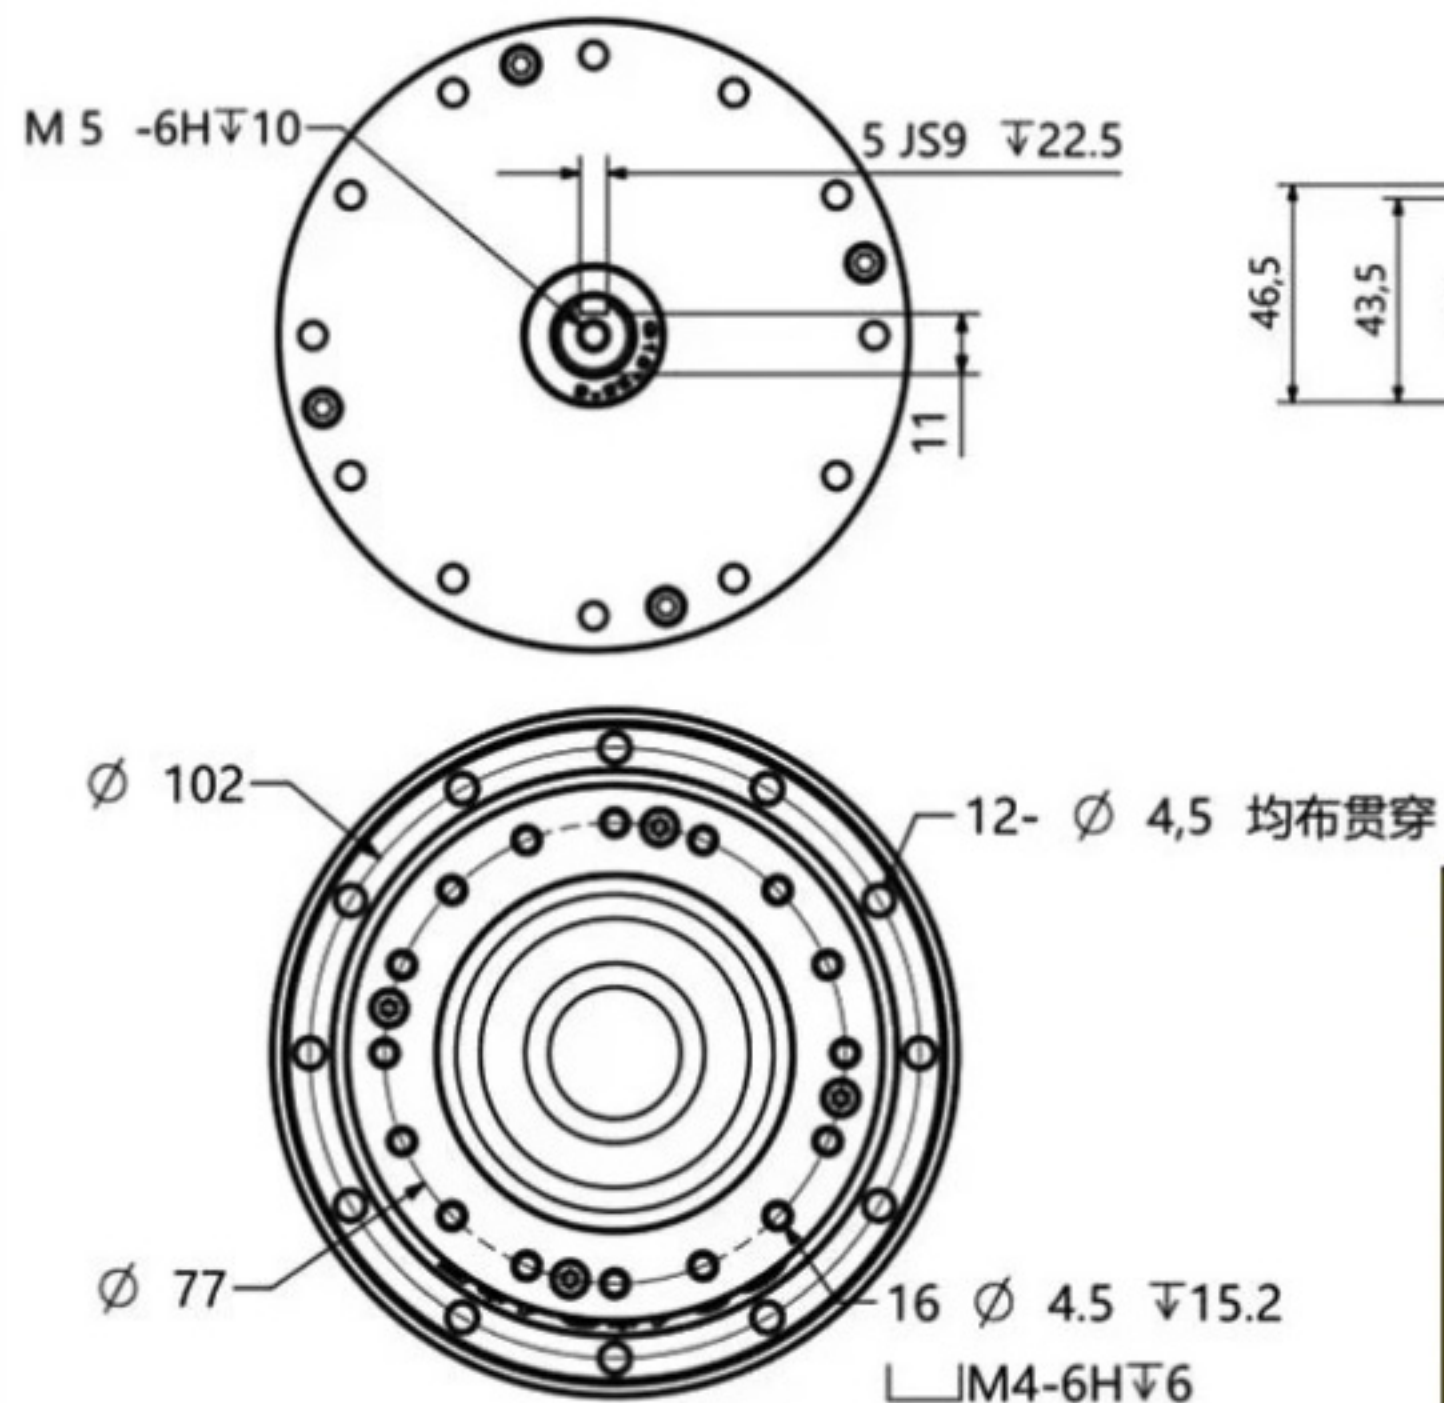

This harmonic reducer is connected to the motor using synchronous wheels and belts, and is not equipped by default. If you need it, you can contact us for customization.

5 js9 22.5

M 5 -6H 10

11

58.5

53.5

12

12- 5.5 均布贯穿

16- 5.5 20.5

M5-6H 9

132

100

